




Well Name:University Block 14 Cons #2005XH				Date Last Updated:		09.21.21		J. Heatley		
Location: 600' FSL, 1284' FWL, Blk 14, Sec 23,UL (SHL)				Field: Shafter Lake (San Andres) (82570500)						
County: Andrews		Texas								
API# 42-003-48071				Size, in	Wgt, lb/ft	Grade	Hole Size	Depth (MD)	Sx. Cmt.	
GL:	3235			Conductor:	20	60		40'		
KB:	3250			Surf. Csg:	9 5/8	36	J-55	12 1/4"	1705'	556
Spud:	8/18/2021	KOP:	3756'	Prod Csg/Lateral:	5 1/2	20	L-80	8 3/4"	12340'	3784
TD:	12340'									
Completion Start: 9/2/2021		On Production: 9/13/2021		Waterboard (GAU): February-19						
Completion Finish: 9/12/2021		Drilling Permit: 871101		# of Centralizers and Spacing: 14		One @ shot joint and every third to surf.				

Sands	Tops
Yates	
Seven Rivers	
Queen	
Grayburg	
San Andres	

Potential		
Time	Oil	Water
IP	441	1907

Type of Work	Vendor	Rep
Cement (Surface)	American Cementing	
Cement (Production)	American Cementing	
Frac	Cudd	Robert Stephenson
Directional Company	DrillTech	Chris Scrantz
Drilling Company	Total Energy Services	Larry White
Rig Company	Robinson	
Rig #:		Robinson #3

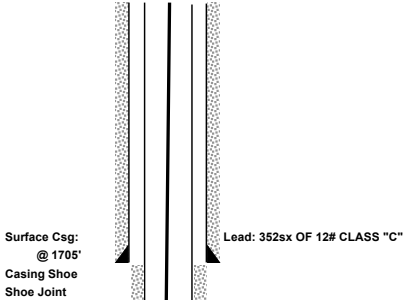

TOC
@ Sfc

KOP:
@ 3756'

Tail: 204 sx OF 14.8# CLASS "C".

Tubing: 2 7/8" J-55									
OD 2 7/8				Thread 8 RD		WT 6.5		Grade J-55	
OD				Thread		WT		Grade	
Rod Detail									
Desc:		No.	Length	Size	Pump: 372 Stages 416 SS MDL 400				
					Type: ESP				
					Size 1050				
					Barrel				
					Spaced @				
					Pumping Unit				
					Stroke:		Sheave:		Tbg Spool:
					SPM:		Belts:		
Total Length:				Motor:		Size or HP:		110 HP Drive	
Tubing & BHA									
# / # Joints					Size	Wt	Gr.	Depth	Length
137 2 7/8" 6.5# J-55 EUE 8RD Tubing					2 7/8	6.50	J-55	4379.13	4379.13
1 12" x 2 7/8" Centralizer					2 7/8			4381.13	2.00
1 2 7/8" 6.5# J-55 EUE 8RD Tubing					2 7/8			4409.13	28.00
1 2 7/8" BOH					2 7/8			4409.66	0.53
1 3000 400 Pump w/ 134 Stages								4433.18	23.52
1 3000 400 Pump w/ 134 Stages								4456.70	23.52
1 3000 400 Pump w/ 104 Stages								4475.72	19.02
1 Intake 400								4480.02	4.30
1 Seal 400								4486.12	6.10
1 Seal 400								4492.22	6.10
1 75 HP 1050 VT 53 AMP 375 Motor								4513.10	20.88
75 HP 1050 VT 53 AMP 375 Motor								4534.00	20.90
75 HP 1050 VT 53 AMP 375 Motor								4554.80	20.80
1 DH Sensor 375 OD								4557.60	2.80
1 5 1/2" Cavins Desander								4562.13	4.53
4 2 7/8" J-55 6.5# 8RD OD/ID cermaic coated tb					2 7/8			4659.25	97.12
1 2 7/8" Coated Bull Plug					2 7/8			4659.85	0.60

Perfs:
4968' - 12072'

Lead: 571 SX OF 11.5# CLASS C

Tail: 3213 SX OF 13.5# CLASS C.



Productin Csg: 12340
Float Shoe 12338
Shoe Joint 12292
Float Collar 12291